

## DOTBOX Light Dot GRAPHITE - OPAL lens



Dotbox, the "focal point" of visible implants. Designed for both modern and historic environments, it is a versatile product capable of integrating sockets, switches and can also become a luminous body, thus offering the freedom to express your creativity and tracing new constellations. The DOTBOX system is an aluminum alloy product obtained by die-casting with IP40 grade of protection. Along the perimeter it is possible to make up to eight punctures, with increments of 45°, following the traces of the mask supplied. In the Light Dot configuration the system becomes a ceiling light with the possibility of being integrated into the system or used as a light point.

### TECHNICAL SPECIFICATIONS

Standard	IEC/EN 602208 IEC/EN 60670-1
Material	Aluminum alloy Opal lens in borosilicate glass
Treatment	High hard anodizing thickness (protective treatment on request)
Protection grade IP	IP40
Impact resistance	IK08
Isolation class	I
Hole fitting*	Ø 26 to drill for Ø 22 tube
Storage temperature	-50°C - +90°C
Operating temperature	-40°C - +90°C
Bulb fitting	GX53   LED Module

### LDGO-Graphite

Ø 135 - H 58

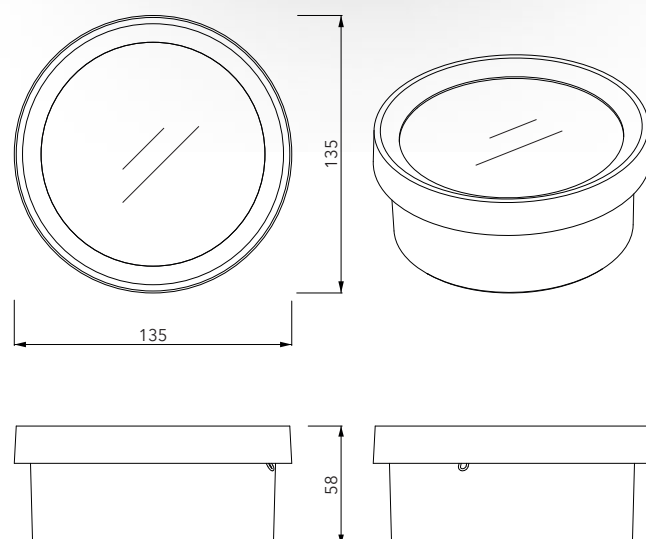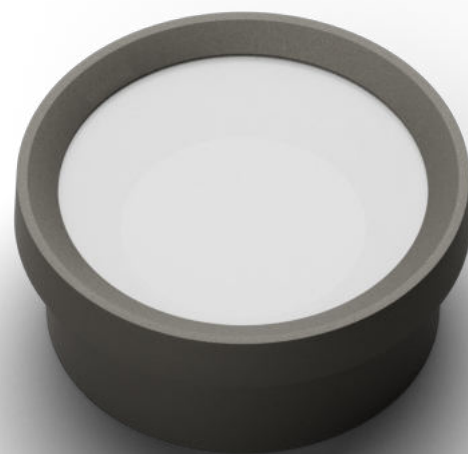

\*Quick-action coupling included

## DOTBOX Light Dot GRAPHITE - FRESNEL lens


Dotbox, the "focal point" of visible implants. Designed for both modern and historic environments, it is a versatile product capable of integrating sockets, switches and can also become a luminous body, thus offering the freedom to express your creativity and tracing new constellations. The DOTBOX system is an aluminum alloy product obtained by die-casting with IP40 grade of protection. Along the perimeter it is possible to make up to eight punctures, with increments of 45°, following the traces of the mask supplied. In the Light Dot configuration the system becomes a ceiling light with the possibility of being integrated into the system or used as a light point.

### TECHNICAL SPECIFICATIONS

Standard	IEC/EN 602208 IEC/EN 60670-1
Material	Aluminum alloy, Fresnel lens in borosilicate glass
Treatment	High hard anodizing thickness (protective treatment on request)
Protection grade IP	IP40
Impact resistance	IK08
Isolation class	I
Hole fitting*	Ø 26 to drill for Ø 22 tube
Storage temperature	-50°C - +90°C
Operating temperature	-40°C - +90°C
Bulb fitting	GX53   LED Module

### LDGF-Graphite

Ø 135 - H 58

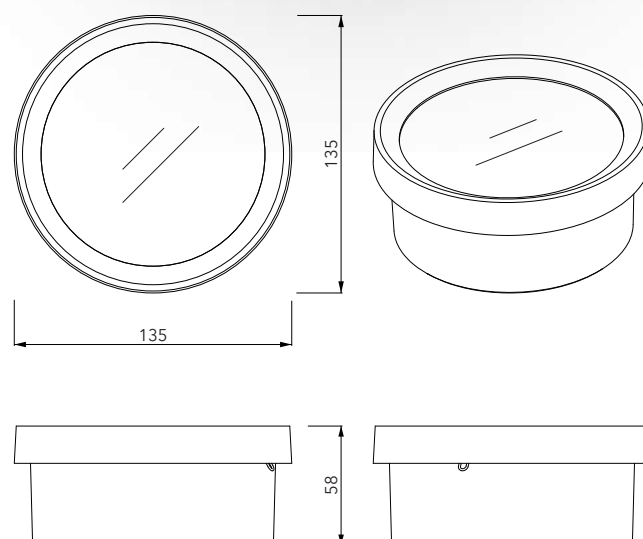

\*Quick-action coupling included

## LED MODULE Ø70

Constant voltage LED board, 24Vdc  
Max power 21.5W  
Max lumen 2957 lm  
Dimmable with standard power supply with Dali, Triac, Push, 0-10V, 1-10V technology  
Suitable for micro push connectors for snap-in fixing of cables. Not self dissipated

### TECHNICAL SPECIFICATIONS

Standard	EN62031   EN62471 IEC TR62778
LED module	With PWM Current Input   Input to DC Current
Temperature	2700 K   3000 K
Lumen	1825 lm   1920 lm
Voltage	24V
Printed circuit material	IMS
Printed circuit board	UL
Protection grade	IP20
Dimmerable	With standard power supply with Dali, Triac technology, Push, 0-10V, 1-10V
Beam angle	120°
LED numbers	48
Wattage	21.5W
PCB	IMS 1.6 mm
LED Type	OSRAM*2835
RA/CRI	Standard CRI>80, on request CRI>90
Sep MacAdam (SDCM)	3
R9	CRI 80 ≥ 0      CRI 90 ≥ 50
Factor of Safety (FoS)	1
Lumen maintenance factor	@10000h/tc 85°C =0.97 EPREL:@3000h/tc 85°C=0.96
Maximum operating voltage of insulation	60V

#### RICL7027



2700K

Dimensions (mm)  
Ø 70 - H 2.5 mm  
(With micro push)

#### RICL7030

3000K

Dimensions (mm)  
Ø 70 - H 2.5 mm  
(With micro push)

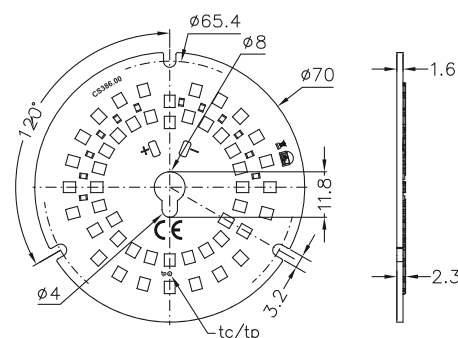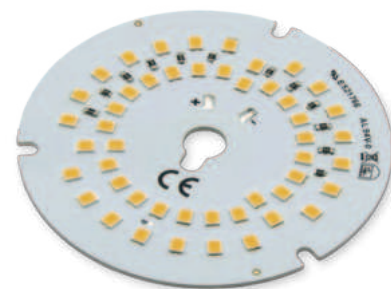

#### Cablaggio / Wiring

##### Micro push

Conduttore rigido - Solid conductor  
0.14-0.34mm² / AWG26-AWG22



##### Cavo / Cable

Conduttore rigido - Solid conductor  
Conduttore flessibile - Stranded conductor  
0.25-0.75mm² / AWG24-AWG18




### AVAILABLE DRIVERS

AL20

LED 24V - 20W

AL30

LED 24V - 30W

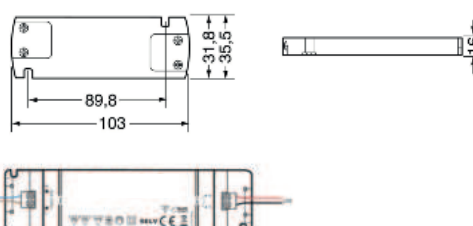


\*Module RICL4627 or RICL4630, RICL7027 or RICL7030, integrated depending on the model chosen.

\*Illustrative images only.  
Please note that Genuit does not assume responsibility in the event that the lamps and/or drivers supplied are not the same as the above figures.

Vdc Input (V)		Power Typ (W)	
24		21.5	
CCT	Power Typ (W)	CRI>80	
		Lumen Typ (lm)	Energy efficiency
2700K	21.5	2793	E
3000K		2875	E

Tolleranza valori / Values tolerances:  $\pm 10\%$

### Curva tipica di distribuzione della luce *Luminous intensity distribution*

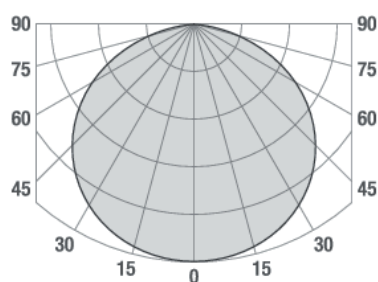

Tensione costante  
*Constant voltage*



Angolo del fascio luminoso  
*Beam angle*



Dimmerabile  
*Dimmable*