


TUBE GRAPHITE

Genuit metal tubes guarantee excellent impact resistance, ensuring in case of dispersion, thanks to the relative fittings, the electrical continuity up to the grounding inside the Genuit Wallboxes.

TECHNICAL SPECIFICATIONS

Standards	EN12735-1 EN 12449
Material	Galvanizing steel
Treatment	Powder coating (protective treatment on request)
Tensile strength	MPa 448,00
Elongation	5,00 %
Vickers hardness	130 - 140
Yield load	MPa 400 - 420
Impact resistance	IK10
Isolation class	I
Storage temperature	-50°C - +90°C
Operating temperature	-40°C - +90°C

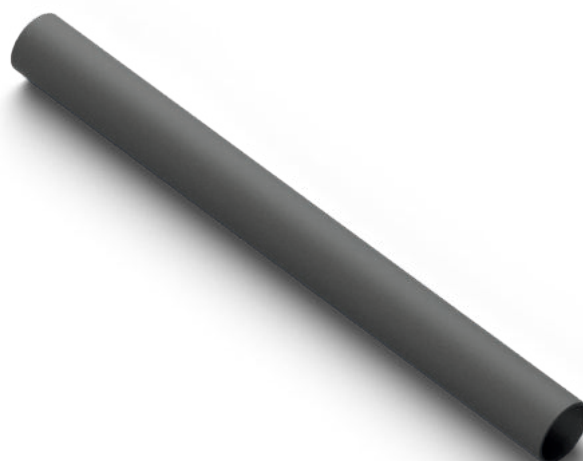

T22 - Graphite
Ø22 x 1 x 3000 L.

